



[→ See All Eaton 3S UPS Documentation](#)

[→ See all Eaton 3S models](#)


3S700AU

Eaton 3S 700 VA (AU)


General

Configuration	Powerboard
Part Number	3S700AU
Color	Black
Rating (VA/Watts)	700/420
Dimensions (H x W x D, mm)	86 x 170 x 335
Weight (kg)	3.8
Warranty	3-year warranty on electronics, 2-year warranty on battery, \$25,000 load protection guarantee
Contents (Ships with the following items)	USB cable and User Manual


Electrical Input

Connection	(1) Aust. 10A
	
Input Cord	1.5 metre fixed cord with Australian 10A plug
Input Voltage Range	Up to 161-284 V (adjustable)
Frequency	50/60 Hz autoselect

Electrical Output

Voltages	240 V (settable to 220 V, 230 V or 240 V)	
Output Receptacles	(3) Aust. 10A	(3) Aust. 10A surge only
		

Battery

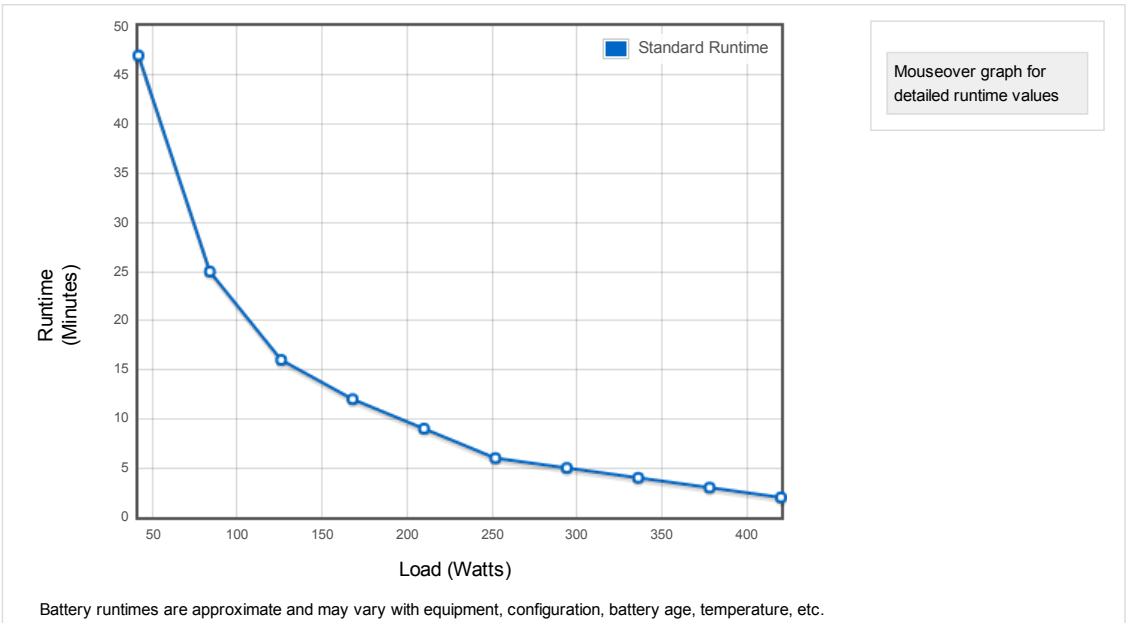

Battery Type	Compact, sealed lead-acid (replaceable)
--------------	---

Battery Replacement Indicators	LED
--------------------------------	-----

Battery Test	Yes
--------------	-----

Cold start (No mains power)	Yes
-----------------------------	-----

Deep Discharge Protection	Yes
---------------------------	-----

Communications

Communication Ports	HID-compliant USB port for automatic integration with most common operating systems (Windows XP, Vista and 7, Linux, Mac OS X), cable supplied
---------------------	--

Environmental & Standards

Safety markings	IEC/EN 62040-1-1, CE mark, A-Tick
-----------------	-----------------------------------

EMC Markings	IEC 62040-2, C-Tick
--------------	---------------------

Data Line Protection	Tel/fax/modem/internet/Ethernet
----------------------	---------------------------------

In the interests of continuous product improvement all specifications are subject to change without notice.



[Privacy Policy](#)
[Terms & Conditions](#)
[Copyright](#)

© 2016 Eaton
All Rights Reserved