3634 Central Ave. · St. Petersburg, Florida 33711 · Phone 727-328-2818 · 800-RING-IMR · FAX 727/328-2826 · **E-mai**l: sales@imrusa.com www.imrusa.com



# -COMBUSTION GAS ANALYZER IMR 1400 – compact (SO<sub>2</sub>) Series

## IMR 1400 - compact (SO<sub>2</sub>)

Standard SO<sub>2</sub>-sensor

- has been designed to measure
  - flue gases on 
    ☐ Boilers
- □ Turbines
- ☐ Burners ☐ Engines
- ☐ Cars
  ☐ Trucks
- has been developed to meet
- the customers need is a high quality combustion
- gas analyzer using the latest sensor technology
- is easy to use and will measure all the important parameters to adjust or optimize the combustion process

IMR 1400-c - compact (SO<sub>2</sub>)



#### STANDARD FEATURES

- Portable and very compact combustion gas analyzer housed in a rugged aluminum case
- Simultaneous measurement of

O<sub>2</sub> Oxygen

CO Carbon Monoxide

SO<sub>2</sub> Sulfur Dioxide

TG Flue-gas temperature

Calculation of following parameters according ASME-equations

Combustion efficiency

Losses

Excess Air

CO<sub>2</sub> Carbon Dioxide

- > 7 Fuels are programmed 5 fuels are programmable
- Automatic zero calibration
- Integrated self-check program
- > Simultaneous display of eight parameters on the illuminated display
- Unit selection : ppm mg mg(ref O<sub>2</sub>) mg/kWh
- Gas sampling probe E length 0.8 ft, hose 8 ft
- Rechargeable battery with charger
- Power supply 110V or 230V

### OPTIONAL FEATURES

- Ambient air temperature probe
- Gas sampling probe with heated handle
- Gas sampling probes with different lengths
- Electronic controlled soot measurement
- Draft measurement
- NO<sub>x</sub>-measurement

- ♦ NO₂-measurement
- HC-measurement
- CO-bypass valve with purging pump
- RS 232 interface
- Memory for 200 measurements
- 12V DC power jack





## **Environmental Equipment, Inc.**


3634 Central Ave. · St. Petersburg, Florida 33711 · Phone 727-328-2818 · 800-RING-IMR · FAX 727/328-2826 · **E-mai**l: sales@imrusa.com www.imrusa.com

IMR 1400-c - compact (SO<sub>2</sub>)

**NEW** 

**AND** 

**IMPROVED** 

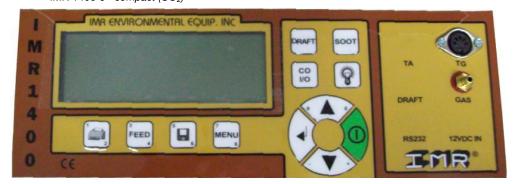

PARAMETER	PRINCIPLE	RESOLUTION	ACCURACY	RANGE	STANDARD
O <sub>2</sub> Oxygen	Electro-chemical cell	0.1 Vol.%	± 0.2 %	0-20.9Vol. %	✓
CO Carbon monoxide	Electro-chemical cell	1 ppm	5 %	0-2000/4000ppm	✓
COp CO pure	Calculation	1 ppm	5 %		✓
NO Nitric oxide	Electro-chemical cell	1 ppm	5 %	0-2000 ppm	
NO <sub>2</sub> Nitric dioxide	Electro-chemical cell	1 ppm	5 %	0- 100 ppm	
SO <sub>2</sub> Sulfur dioxide	Electro-chemical cell	1 ppm	5 %	0-4000 ppm	✓
HC Hydrocarbons	Sensor	0.1%	5 %	0-100% LEL	
TG Flue gas temperature	NiCr-Ni	1 K	± 2 %	-4°F / 2192°F	✓
	thermocouple				
TA Air temperature	Semiconductor	1 K	$\pm$ 0.5 K	-4°F / 248°F	
P Draft	Solid state	0.004" H <sub>2</sub> O	± 2 %	- 12" / 20" H <sub>2</sub> O	
CO <sub>2</sub> Carbon dioxide	Calculation	0.1 Vol.%	± 0.2 %	0- CO <sub>2</sub> max	✓
Efficiency	Calculation	1 %	± 0.5 %	0-999 %	✓
Losses	Calculation	1 %	± 0.5 %	0-999 %	✓
Excess Air	Calculation	1 %	± 2 %	0-999 %	✓
Soot	Filter paper method				

Other measurement ranges are available upon request

Equipped with max 4 sensors

MODEL	PART-NO.
IMR 1400-c - compact (SO <sub>2</sub> )	IMR 14091
Dimensions (inch): 12 x 9 x 4.6	
Weight: 6.7 lb. (2.9kg)	

IMR 1400-c/p - compact - printer (SO<sub>2</sub>) IMR 14191 Dimensions (inch): 16.7 x 7.3 x 11.4

Weight: 13 lb. (5.8kg)

Represented by:		
ricpresented by:		



IMR Environmental Equipment, Inc. reserves the right to adopt technical modifications without prior notice.