



HOBO ZW Series is a family of wireless data nodes that provide centralized monitoring of energy and environmental conditions in buildings.

Best suited for on-site facility monitoring applications where web-based data access is not required, HOBO data nodes transmit high-accuracy, real-time data from dozens of points to a central PC. This eliminates the need of having to manually retrieve and offload individual data loggers, saving you time and money.

Measurements:

- | | |
|-------------------|-----------------------|
| Temperature | Compressed airflow |
| Relative humidity | DC current |
| AC voltage | Differential pressure |
| AC current | Water usage |
| Kilowatts | 4-20 mA |
| Kilowatt hours | 0-10 vdc |
| Gauge pressure | Pulse |
| CO ₂ | |

Key Advantages:


- Provides centralized building performance data collection
- Transmission of real-time data within a self-healing mesh network eliminates line-of-sight issues
- Automatically routes data back to receiver
- Onboard buffer memory helps prevent data loss
- Alarm notification via email or text messages
- Powerful software for organizing and viewing data
- Map deployed data nodes
- Label and group data nodes for easy identification

Centralized Data Collection


HOBO data nodes, routers, and receivers all work together as a system to provide reliable, accurate real-time information on how a building is performing. Whether you are a warehouse manager looking to keep a close eye on temperature and humidity conditions, a facility manager looking at indoor air quality, or a building energy manager tracking energy use, HOBO data nodes provide reliable data collection without the hassles of manually offloading data.

Self-Healing Technology


HOBO data nodes leverage MESH networking technology, which ensures that data is automatically re-routed back to the receiver without any manual intervention.

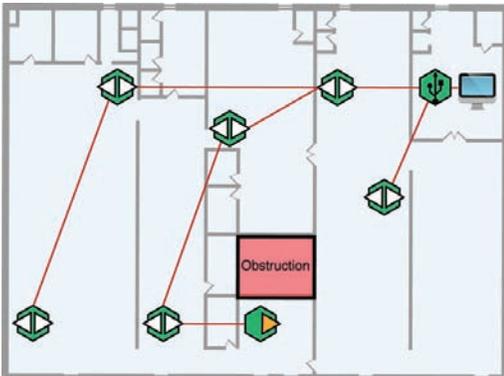

Scenario 1. Typical data flow back to the receiver

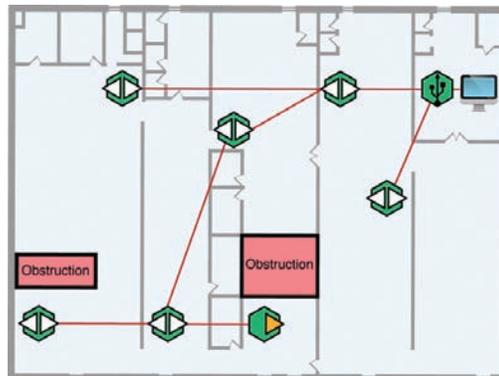

Scenario 2. Self healing network automatically compensates for new obstruction





HOBOWare Pro 3.0 is included with the ZW Receiver

Advanced Software Capabilities


HOBOnode™ Manager software, a component of HOBOWare Pro graphing and analysis software, lets you view real-time energy and environmental data, set alarm notifications, and get an at-a-glance view of your network with the Network Map feature. HOBOnode Manager software also offers one-click export of your data to Microsoft Excel and other programs, and provides network signal strength indication.

Alarm Capabilities:

- HOBOnode Manager software will send a text message to your phone and email your computer when conditions exceed set thresholds.
- System alarms lets you know if a data node is not connected to your network.

Network Map Feature

In many monitoring applications, it's important to view a complete network of your HOBOWare Data Nodes. HOBOnode Manager's Network Map feature provides an at-a-glance view of your network so you can easily locate your HOBOWare Data Nodes within a building.

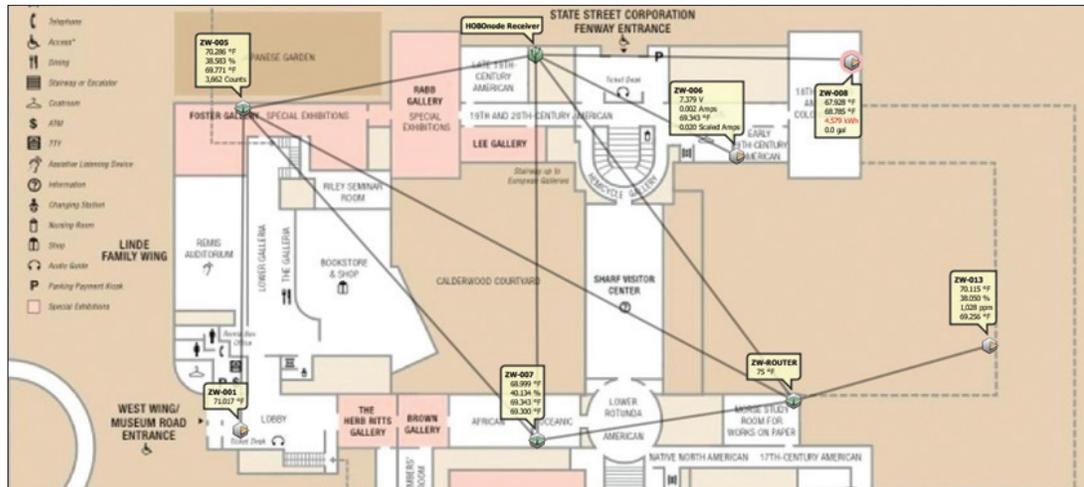

HOBOnode manager's Network Map feature provides at-a-glance view of a HOBOWare data node network.

Specifications

	 ZW-RCVR (Receiver)	 ZW-001	 ZW-003	 ZW-005**	 ZW-006	 ZW-007**	 ZW-008	 ZW-ROUTER (Router)
Measurements	N/A	Temp	Temp, RH	External T/RH, 1 analog port, 1 pulse input port	4 external analog ports	External T/RH, 2 analog ports	2 analog ports, 2 pulse input ports	N/A
Probe Size				1cm (0.38 in) diameter probe on 1.8 m (6ft cable)		1cm (0.38 in) diameter probe on 1.8 m (6ft cable)		
Buffer memory	up to 95k measurements	5k measurements	4k measurements	3k measurements	3k measurements	3k measurements	3k measurements	N/A
Sample rate	N/A	1 min to 18 hrs	1 min to 18 hrs	1 min to 18 hrs	1 min to 18 hrs	1 min to 18 hrs	1 min to 18 hrs	N/A
Transmission rate	N/A	2 min and greater	2 min and greater	2 min and greater	2 min and greater	2 min and greater	2 min and greater	N/A
Power options	AC power adapter, USB, Battery	AC power adapter, Battery Backup	AC power adapter, Battery Backup	AC power adapter, Battery Backup	AC power adapter, Battery Backup	AC power adapter, Battery Backup	AC power adapter, Battery Backup	AC power adapter, Battery Backup
Measurement range	N/A	Temp: -40° to 70° C (-40° to 158° F)	Temp: -40° to 70° C (-40° to 158° F) RH: 5 to 95% RH	Temp: -40° to 70° C (-40° to 158° F) RH: 5 to 95% RH Analog channels: 0 to 2.5 Vdc; 0 to 5 Vdc (w/CABLE-ADAP5); 0 to 10 Vdc (w/ CABLE-ADAP10) 4-20 mA Pulse channel: 0 to 65,535 pulses per logging interval	Analog channels: 0 to 2.5 Vdc; 0 to 5 Vdc (w/CABLE-ADAP5); 0 to 10 Vdc (w/ CABLE-ADAP10)	Temp: -40° to 70° C (-40° to 158° F) RH: 5 to 95% RH Analog channels: 0 to 2.5 Vdc; 0 to 5 Vdc (w/ CABLE-ADAP5); 0 to 10 Vdc (w/ CABLE-ADAP10). 4-20 mA Pulse channel: 0 to 65,535 pulses per logging interval	Analog channels: 0 to 2.5 Vdc; 0 to 5 Vdc (w/ CABLE-ADAP5); 0 to 10 Vdc (w/ CABLE-ADAP10). 4-20 mA Pulse channel: 0 to 65,535 pulses per logging interval	N/A
Accuracy	N/A	Temp: ± 0.2° C over 0° to 50° C (± 0.36° F over 32° to 122° F)	Temp: ± 0.2° C over 0° to 50° C (± 0.36° F over 32° to 122° F) RH: ± 2.5% from 10 to 90% typical, max. ± 3.5%	Temp: ± 0.2° C over 0° to 50° C (± 0.36° F over 32° to 122° F) RH: ± 2.5% from 10 to 90% typical, max. ± 3.5% Analog: ± 1.544 mV plus 2% of reading (typical)	Analog: ± 1.544 mV plus 2% of reading (typical)	Temp: ± 0.2° C over 0° to 50° C (± 0.36° F over 32° to 122° F) RH: ± 2.5% from 10 to 90% typical, max. ± 3.5% Analog: ± 1.544 mV plus 2% of reading (typical)	Analog: ± 1.544 mV plus 2% of reading (typical)	N/A
Resolution	N/A	Temp: 0.02° C @ 25° C (0.04° F @ 77° F)	Temp: 0.02° C @ 25° C (0.04° F @ 77° F) RH: 0.03%	Temp: 0.02° C @ 25° C (0.04° F @ 77° F) RH: 0.03% Analog channel: 0.6 mV Pulse Channel: 1 pulse	Analog channel: 0.6mV	Temp: 0.02° C @ 25° C (0.04° F @ 77° F) RH: 0.03% Analog channel: 0.6 mV	Analog channel: 0.6mV Pulse Channel: 1 pulse	N/A
Response time	N/A	Temp: 5 min. in air moving 1 m/s (3.3 ft/sec)	Temp: 5 min. in air moving 1 m/s (3.3 ft/sec) RH: 10 min. in air moving 1 m/s (3.3 ft/sec)	Temp: 5 min. in air moving 1 m/s (3.3 ft./sec) RH: 10 min. in air moving 1 m/s (3.3ft/sec)	Dependent on sensor	Temp: 5 min. in air moving 1 m/s (3.3 ft./sec) RH: 10 min. in air moving 1 m/s (3.3ft/sec)	Dependent on sensor	N/A

A base system requires a HOBO Data Node, Receiver, and HOBOWare Pro software*

Common Specifications

Range: Approx. 100 m (300ft.) depending on obstructions or interference
Weight: 138 g (4.87 oz) with batteries
Size: 96.5 x 108 x 28 mm (3.8 x 4.25x 1.1 in)

Radio Power: 1.6 mW (2 dBm)
Wireless data Standard: IEEE 802.15.4 2.4 GHz band

For more detailed specifications, please refer to individual device manuals
FCC Certified. Check www.onsetcomp.com for the latest certification.



* HOBOWare Pro is included with the cost of the ZW Receiver.

**External T/RH cables included

Ordering Information

Data Loggers

Receiver & HOBOWare Pro Software	ZW-RCVR
Router only	ZW-ROUTER
Integrated Temperature	ZW-001
Integrated Temperature/RH	ZW-003
External- T/RH, (1) analog, (1) pulse	ZW-005
External- (4) analog	ZW-006
External- T/RH, (2) analog	ZW-007
External- (2) analog, (2) pulse	ZW-008

kWh***

WattNode Wye config 208/240	T-WNB-3Y-208
WattNode Wye 208/240 opt P3	T-WNB-3Y-208P
WattNode Delta/Wye config 208/240	T-WNB-3D-240
WattNode Delta/Wye config 480	T-WNB-3D-480
"B" Series Voltage Lead Set	A-WNB-LEADSET
Veris 1-phase, 300 Amp	T-VER-8051-300
Veris 3-phase, 800 Amp	T-VER-8053-800

Water Flow***

Water Flow Meter	T-MINOL-130
------------------	-------------

kW**

3 Phase, 480V, 100 AMP	T-VER-8044-100
------------------------	----------------

Gauge Pressure†**

100 psig	T-ASH-G2-100
200 psig	T-ASH-G2-200
500 psig	T-ASH-G2-500

Differential Air Pressure Transducer*†**

.01-10.0 WC	T-VER-PXU-L
.01-10.0 WC	T-VER-PXU-X

Humidity†**

Duct-Mount RH/Temp	T-VAI-HMD-40Y
--------------------	---------------

DC Current†**

0-200 Amp	T-VER-H970-200
-200 to 200 Amp	T-VER-971BP-200

Air Velocity Sensor†**

0.15-10 m/s	T-DCI-F900-L-P
0.15-5 m/s	T-DCI-F900-L-O
0.15-10 m/s	T-DCI-F900-S-P
0.15-5 m/s	T-DCI-F900-S-O

* Requires HOBOWare Pro software

** Requires input cable

*** Requires pulse input adapter

† Requires sensor power adapter (AC-SENS-1)

Power adapters are supplied with ZW-RCVR, ZW-ROUTER, and all data node models.

Compressed Air Flow Meter**

1-80 SCFM	T-CDI-5200-10S
3-350 SCFM	T-CDI-5400-20S

Volatile Organic Compound (VOC)†**

0-10, 0-100, 0-1000 ppm	T-ION-TVOC
-------------------------	------------

Temperature Sensors

Air/Water/Soil Probe 0.3m (1ft)	TMC1-HD
Air/Water/Soil Probe 1.8m (6ft)	TMC6-HD
Air/Water/Soil Probe 6.1m (20ft)	TMC20-HD
Air/Water/Soil Probe 15.2m (50ft)	TMC50-HD
Stainless Steel Temp Probe 1.8m (6ft)	TMC6-HC
Pipe Temp 1.8m (6ft)	TMC6-HE

Split-core AC Current Sensors

0-20 Amps AC	CTV-A
0-50 Amps AC	CTV-B
0-100 Amps AC	CTV-C
0-200 Amps AC	CTV-D
0-600 Amps AC	CTV-E

CO₂**

Telaire CO ₂ /Temp Monitor	TEL-7001
---------------------------------------	----------

AC Voltage Transmitters**

0 - 150 Volts AC	T-CON-ACT-150
0 - 300 Volts AC	T-CON-ACT-300

DC Voltage

0 - 2.5 Volts DC	CABLE-2.5-STEREO
0 - 5 Volts DC	CABLE-ADAP5
0 - 10 Volts DC	CABLE-ADAP10

Milliamps

4 - 20mA	CABLE-4-20MA
----------	--------------

Software

HOBOWare Pro Software
(Windows®/MAC®)

Accessories

Sensor Power Adapter, 12 Volt DC @ 400mA	AC-SENS-1
---	-----------

Sensor Compatibility Chart

Measurement	Part Number	Adapter Cable	Excitation Required	Power Source
DC Amperage -200 to 200 AMP	T-VER-971BP-200	CABLE-4-20mA	12 VDC, 35mA	AC-SENS-1
DC Amperage 0 - 200 AMP	T-VER-H970-200	*CABLE-ADAP5		AC-SENS-1
AC Voltage Transmitters up to 300 VAC	T-CON-ACT-xxx	CABLE-4-20mA		
Split-Core AC Current Sensors up to 600 AMP	CTV-x	-		
Power (kW) 3 phase, 100 AMP	T-VER-8044-100	CABLE-4-20mA	12Vdc, 30mA	AC-SENS-1
Kilowatt Hours (kWh) 1 phase, 300 AMP	T-VER-8051-300	CABLE-2.5-STEREO		
Kilowatt Hours (kWh) 3 phase, 800 AMP	T-VER-8053-800	CABLE-2.5-STEREO		
Kilowatt Hours (kWh) Delta/Wye 240	T-WNB-3D-240	CABLE-2.5-STEREO		
Kilowatt Hours (kWh) Delta/Wye 480	T-WNB-3D-480	CABLE-2.5-STEREO		
Kilowatt Hours (kWh) Wye 208/240	T-WNB-3Y-208	CABLE-2.5-STEREO		
Gauge Pressure	T-ASH-G2-xxx	CABLE-ADAP5	12 VDC, 5mA	AC-SENS-1
Differential Air Pressure	T-VER-PXU-L	*CABLE-ADAP10	12Vdc, 35mW	AC-SENS-1
Differential Air Pressure	T-VER-PXU-X	*CABLE-ADAP10	12Vdc, 35mW	AC-SENS-1
Carbon Dioxide	TEL-7001	CABLE-CO ₂		comes with AC adapter
Compressed Air Flow Meter	T-CDI-5200-10S	*CABLE-2.5-STEREO	comes with AC adapter	comes with AC adapter
Compressed Air Flow Meter	T-CDI-5400-20S	*CABLE-2.5-STEREO	comes with AC adapter	comes with AC adapter
Water Flow Meter	T-MINOL-130	CABLE-2.5-STEREO		
Air Velocity	T-DCI-F900-L-x	CABLE-ADAP5	12Vdc, 70mA	AC-SENS-1
Air Velocity	T-DCI-F900-S-x	CABLE-ADAP5	12Vdc, 70mA	AC-SENS-1
Volatile Organic Compound (VOC)	T-ION-TVOC	CABLE-4-20mA	12Ddc, 300mA	AC-SENS-1
Stainless Steel temp Probe	TMC6-HC	-		
Pipe Temperature	TMC6-HE	-		
Air Water Soil Temperature	TMCx-HD	-		
0 - 10vdc Input Sensor	CABLE-ADAP10	-		
0 - 5vdc Input Sensor	CABLE-ADAP5	-		
0 - 2.5 Vdc or Pulse Input Sensor	CABLE-2.5-STEREO	-		
4-20mA Input Sensor	CABLE-4-20MA	-		

*4-20mA output option requires CABLE-4-20mA

Contact Us

-  Speak with an application specialist by calling **1300 768 887**
-  Email your inquiry to sales@onetemp.com.au

About OneTemp

We take pride in providing the best fit for your needs with our range of quality instrumentation products that have been carefully selected from amongst the worlds best. We offer an extensive choice in measuring, controlling and recording instruments for industrial and research applications in Australia with over 35 years of experience to speak for us.

Through the years, we have built an enviable foundation in being a solution focused company with a strong commitment to service excellence. Our quality assurance is backed by a highly trained after sales care team in each office and the OneTemp Service and Calibration Centre.