



Face Recognition Terminal Quick Start Guide

UD19290B-A

© 2020 Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.
This Manual is the property of Hangzhou Hikvision Digital Technology Co. Ltd. or its affiliates (hereinafter wholly, by any means, without the prior written permission of Hikvision. Unless otherwise expressly stated herein, Hikvision does not make any warranties, guarantees or representations, express or implied, regarding to the Manual, any information contained herein.

ABout this Manual

The Manual includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version subject to the product of the product ks Acknowledgement vand other Hikvision's trademarks and logos are the properties of Hikvision in various

narks and logos mentioned are the properties of their respective owners.


OTHER TRADEMARKS AND ORDER TO SERVER. THE STORY OF THE PRODUCT PER CONTRICT ON STORY OF THE PRODUCT PRODUCT OF THE PRODUCT OF THE STORY OF THE PRODUCT OF THE STORY OF THE STO

IN THE EVENT OF ANY CONFLICTS BETWEEN 1HIS MANUAL AND THE APPLICABLE DAW, THE LATER PREVAILS Data Protects of device, personal data will be collected, stored and processed. To protect data, the development of Hikvision devices incorporates privacy by design principles. For example, for device with development of Hikvision devices incorporates privacy by design principles. For example, for device with device, only fingerprint implement of the property of the



Use only power supplies listed in the user instructions:

Model	Manufacturer	Stand
C2000IC12.0-24P-DE	MOSO Power Supply Technology Co., Ltd.	CEE
C2000IC12.0-24P-GB	MOSO Power Supply Technology Co., Ltd.	BS
ADS 245 12 1224606	Shonzhon Honor Flostronic Co. Ltd.	CEE

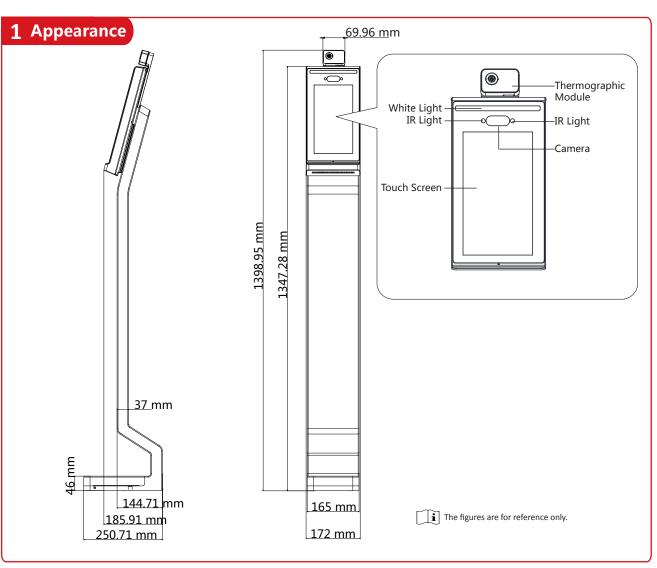

2 Installation


Installation Environment:

through Window

I M6×65 Expension Bolt

Bottom Cover Bottom Screw

- If installing the device indoors, the device should be at least 2 meters away from the light, and at least 3 meters away from the window.
- Make sure the environment illumination is more than 100 Lux.
- Indoor and windless environment use only

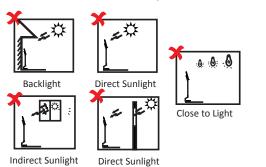

through Window

The actual device

Bracket













appearance varies according to Before you start: Make sure the ground surface has drilled different models. holes for device installation. 1. Remove the two bottom screws (2-SC-KM3×5B-JMF) on both sides of the bottom cover. And remove the bottom

- 2. Align the device with the drilled holes on the ground and insert 3 supplied expension bolts (M6×65). Make sure the expension bolts are higher than the ground.
- 3. Secure the expension bolts with nuts.
- 4. Install the bottom cover back on the device with 2 bottom screws.
- The device should be installed on the concrete surface or other non-flammable surfaces.
 The device supports plug & play. You can put the device on the ground and start operation after powering on.

3.1 Device Wiring (Normal)

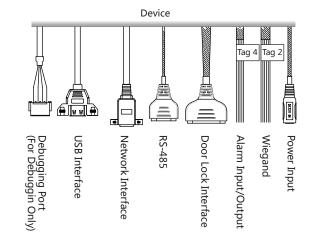

• The wiring diagram of tag 2 and 4 on the left is shown below:

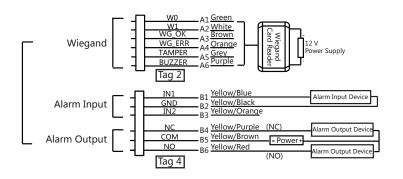

- The Wiegand terminal here is a Wiegand input terminal. You should set the device's Wiegand direction to "Input". If you should connect to an access controller, you should set the Wiegand direction to "Output" For details, see the user manual.
- The power supply should be 12 VDC/2 A.

3.2 Device Wiring (With Secure Door Control Unit) Face Recognition Terminal Secure Door Control Unit Δ1 Red +12V Door Contact lectric The secure door control unit should connect to an external power supply separately. The suggested external power supply is 12 V, 0.5 A.

Activation

Power on and wire the network cable after installation. You should activate the device before the first login.

If the device is not activated yet, it will enter the Activate Device page after powering on.

- Create a password and confirm the password.
- 2. Tan Activate to activate the device.
- For other activation methods, see the device user manual.



STRONG PASSWORD RECOMMENDED-

We highly recommend you create a strong password of your own choosing (using a minimum of 8 characters, including upper case letters, lower case letters, numbers, and special characters) in order to increase the security of your product. And we recommend you reset your password regularly, especially in the high security system, resetting the password monthly or weekly can better protect your product.

5 Temperature Measurement Settings

- 1 Hold the screen surface and verify the identity to enter the main page
- 2. Tap "Temperature" to enter the Temperature Settings page. Configure the parameters.

Enable Temperature Detection:

When enabling the function, the device will authenticate the permissions and at the same time take the tempearture. When disabling the device, the device will authenticate the permissions

Over-Temperature Alarm Threshold:

Edit the threshold according to actual situation. If the detected temperature is higher than the configured one, an alarm will be triggered. By default, the value is 37.3°.

Door Not Open When Detecting Abnormal Termperature:

When Enabling the function, the door will not open when the detected temperature is higher than the configured temperature threshold. By default, the temperature is enabled.

Temperature Measurement Only:

When enabling the function, the device will not authenticate the permissions, but only take the temperature. When disabling the function, the device will authenticate the permsissions and at the same time take the temperature.

- Measurement Area Calibration/Measurement Area Settings
- Configure the temperature measurement area and the correction parameters.
- Black Body Settings:

When enabling the function, you can configure the black body's parameters, including the distance, temperature, and emissivity.

6 Add Face Picture

- 1 Hold the screen surface and verify the identity to enter the
- 2. Enter the User Management page, tap + to enter the Add User
- 3. Set the user parameters according to actual needs.
- 4. Tap Face and collect the face information according to the instructions.
- You can view the captured picture on the screen. Make sure the face picture is in good quality and size. For details about the tips and positions when collecting or comparing the face picture, see the contents on the right.
- 5. If the picture is in good condition, tap the save icon. Or tap the try again icon to take another face picture.
- 6. Tap the save icon save the settings. Go back to the initial page to start authentication. For other authentication methods, see the device user manual.

Recommended:

Use other authentication methods if the device if affected by the



Biometric recognition products are not 100% applicable to anti-spoofing environments. If you require a higher security level, use multiple authentication modes.

Tips When Collecting/ Comparing Face Picture

Expression


- Keep your expression naturally when collecting or comparing face pictures, just like the expression in the picture on the right
- Do not wear hat, sunglasses, or other accessories that can affect the facial recognition function.
- Do not make your hair cover your eyes, ears, etc. and heavy makeup is not allowed

Posture

In order to get a good quality and accurate face picture, position your face looking at the camera when collecting or comparing face pictures.




Make sure your face is in the middle of the collecting window.







Positions When Collecting/ Comparing Face Picture (Recommended Distance: 0.5m)

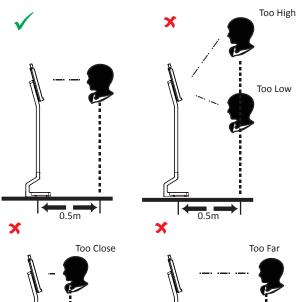

Regulatory Information

Please take attention that changes or modification not expressly approved by the party esponsible for compliance could void the user's authority to operate the equipment **FCC compliance:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 Increase the separation between the equipment and receiver.
- -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- —Consult the dealer or an experienced radio/TV technician for help. This equipment should be installed and operated with a minimum distance 20cm between the radiator and your bodv.

FCC Conditions

his device complies with part 15 of the FCC Rules. Operation is subject to the following two This device may not cause harmful interference.

This device must accept any interference received, including interference that may cause

undesired operation. EU Conformity Statement



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the RE Directive 2014/53/EU, the EMC Directive 2014/30/EU, the RoHS Directive 2011/65/FU.



2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: www.recycle-



2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info

These instructions are intended to ensure that user can use the product correctly to avoid danger or property loss.

The precaution measure is divided into Warnings and Cautions:

Warnings: Neglecting any of the warnings may cause serious injury or death. Cautions: Neglecting any of the cautions may cause injury or equipment damage.

Warnings

All the electronic operation should be strictly compliance with the electrical safety regulations, fire prevention regulations and other related regulations in your local region.

Please use the power adapter, which is provided by normal company. The power consumption cannot be less than the required value.

- Do not connect several devices to one power adapter as adapter overload may cause
- over-heat or fire hazard.

 Please make sure that the power has been disconnected before you wire, install or
- dismantle the device
- When the product is installed on wall or ceiling, the device shall be firmly fixed. If smoke, odors or noise rise from the device, turn off the power at once and unplug the r cable, and then please contact the service center.
- If the product does not work properly, please contact your dealer or the nearest service

center. Never attempt to disassemble the device yourself. (We shall not assume any responsibility for problems caused by unauthorized repair or maintenance.)

• Do not drop the device or subject it to physical shock, and do not expose it to high electromagnetism radiation. Avoid the equipment installation on vibrations surface or places subject to shock (ignorance can cause equipment damage). Do not place the device in extremely hot (refer to the specification of the device for the

- detailed operating temperature), cold, dusty or damp locations, and do not expose it to nigh electromagnetic radiation.
- The device cover for indoor use shall be kept from rain and moisture.
- Exposing the equipment to direct sun light, low ventilation or heat source such as heater r radiator is forbidden (ignorance can cause fire danger). Do not aim the device at the sun or extra bright places. A blooming or smear may occur
 otherwise (which is not a malfunction however), and affecting the endurance of sensor at
- Please use the provided glove when open up the device cover, avoid direct contact with
- he device cover, because the acidic sweat of the fingers may erode the surface coating of
- Please use a soft and dry cloth when clean inside and outside surfaces of the device cover, do not use alkaline detergents.

 Please keep all wrappers after unpack them for future use. In case of any failure
- occurred, you need to return the device to the factory with the original wrapper. Fransportation without the original wrapper may result in damage on the device and lead to additional costs.
- Risk of explosion if the battery is replaced by an incorrect type
 Improper replacement of the battery with an incorrect type may defeat a safeguard (for example, in the case of some lithium battery types).

 This equipment is not suitable for use in locations where children are likely to be
- Do not dispose of the battery into fire or a hot oven, or mechanically crush or cut the battery, which may result in an explosion.
- Do not leave the battery in an extremely high temperature surrounding environment, which may result in an explosion or the leakage of flammable liquid or gas.
- Do not subject the battery to extremely low air pressure, which may result in an
- explosion or the leakage of flammable liquid or gas.

 Dispose of used batteries according to the instructions
- Indoor use. When installing the device indoors, the device should be at least 2 meters away from the light, and at least 3 meters away from the window or the door.