

# PyroUSB


## USB Configurable Infrared Temperature Sensors with 4-20 mA Output



- Temperature ranges from -40°C to 2000°C
- 2-wire 4-20 mA output
- Fully configurable via USB using Modbus protocol. Cable and software included
- Specialised models for measuring metals, high-temperature objects or glass surfaces
- General-purpose models for most other applications
- Peak and valley hold mode allows easy measurement of objects on conveyors
- Stainless steel housing, sealed to IP65
- Quick and easy installation

### CONNECTIONS

The sensor will operate with either the 4 to 20 mA cable connected, the USB cable connected, or both.

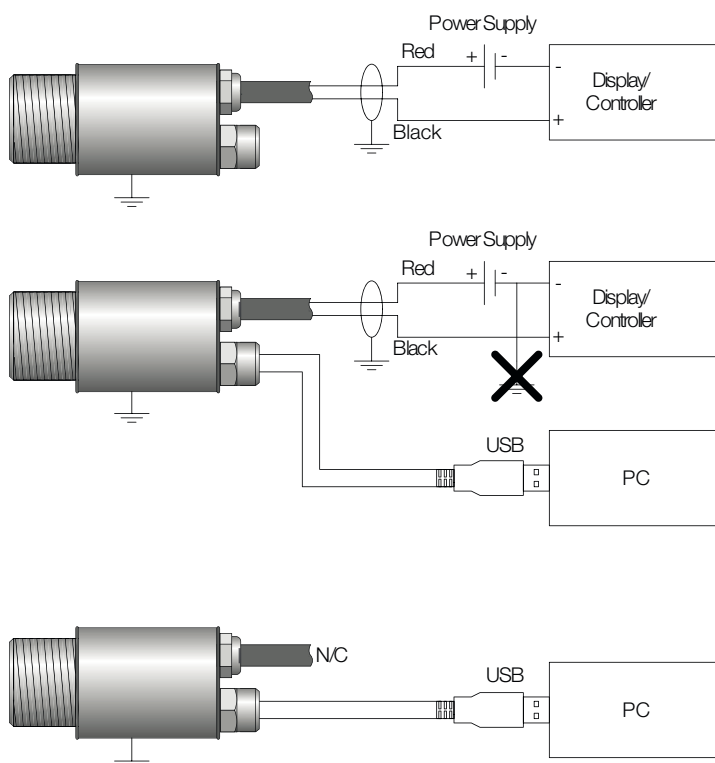

Note: The sensor must be grounded at only one point, either the cable shield or the sensor housing.

The PyroUSB Series measures temperatures from -40°C to 2000°C accurately and consistently, with an outstanding response time of 200 ms. The 4 to 20 mA output is compatible with almost any indicator, controller, recorder or data logger, without the need for special interfacing or signal conditioning.

A choice of measurement wavelengths is available to suit a range of applications.

**General-purpose** PUA8 (8-14  $\mu\text{m}$ ) models can measure from -40°C to 1000°C. They are suitable for measuring high-emissivity materials such as paper, thick plastics, food, pharmaceuticals, rubber, asphalt and painted surfaces. These models are capable of measuring very low temperatures, so they are ideal for sub-zero measurements in the food, logistics and storage industries.

**Short-wavelength** PUA2 (2.2  $\mu\text{m}$ ) models have a choice of temperature ranges from 45°C to 2000°C. They provide a more accurate reading when measuring low-emissivity materials such as many reflective metals. They are also capable of measuring through glass viewports.

**Glass** PUA5 (5  $\mu\text{m}$ ) models can measure from 200°C to 1650°C. They are filtered at a wavelength where glass is least reflective, making them an ideal pyrometer for glass surface temperature measurement.

All models have USB communications. A USB cable and Windows software is included. All data is transmitted via Modbus, so it is also easy to configure and read temperatures from the sensor using third-party software.

The USB cable has an IP65 connector at the sensor end. An IP65 cap protects the sensor when the USB cable is not connected.




## SOFTWARE

CalexConfig is simple, touch-friendly software, compatible with versions of Windows from Vista onwards. CalexConfig is supplied with each sensor, and is also available for download from [www.calex.co.uk](http://www.calex.co.uk).


Alternatively, the sensor's Modbus protocol allows it to be used with other Modbus software.

## FEATURES


- Temperature display
- Scrolling temperature chart
- Data logging to comma-separated text file, compatible with Excel
- Sensor configuration:
  - Emissivity setting
  - Averaging
  - Peak/valley hold processing
  - Reflected energy compensation
  - 4-20 mA output temperature scale

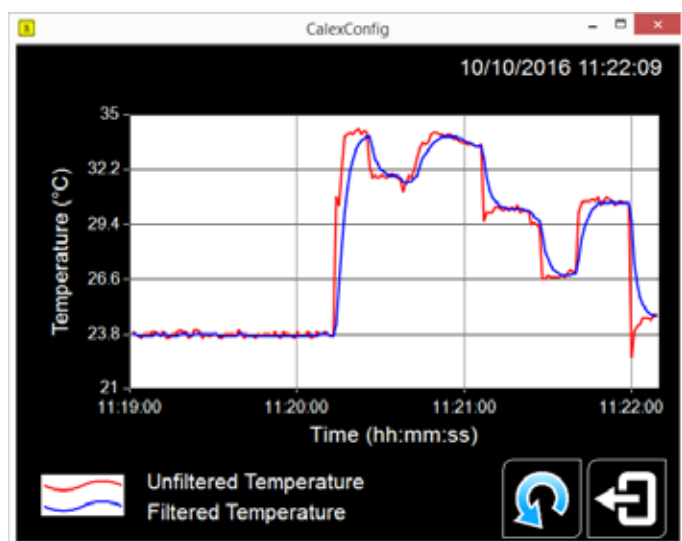

## DIMENSIONS

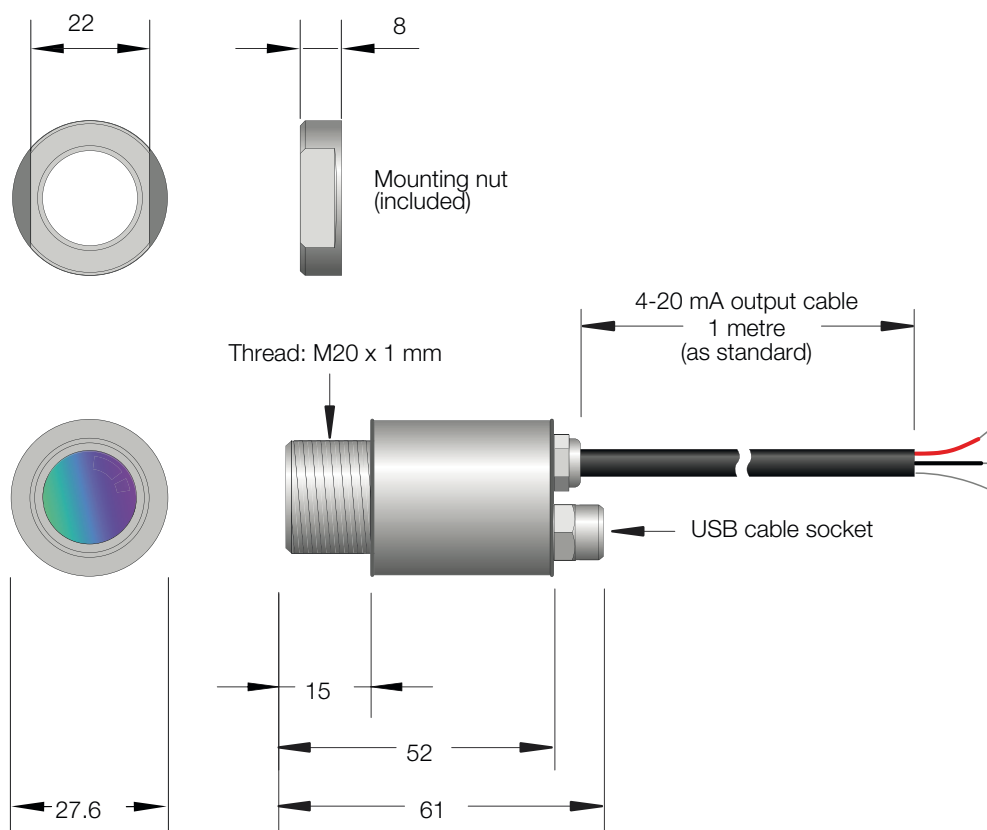


### Optics (PUA2 and PUA5)

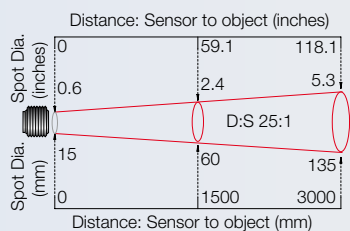


251

### Optics (PUA8)




301




CF


### Optics (PUA2)

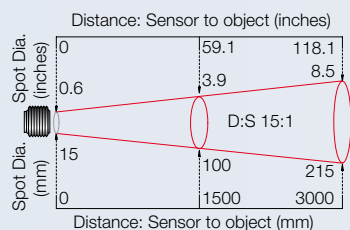

151



751



CF

## GENERAL SPECIFICATIONS

Model	PUA2	PUA5	PUA8
Spectral Response	2.2 μm	5 μm	8 to 14 μm
Application	Ferrous metals and high-temperature targets	Glass	General purpose
Temperature range	Choice of ranges from 45°C to 2000°C	200°C to 1650°C	-40°C to 1000°C
Response time	200 ms		
Output	2-wire, 4-20 mA, linear with measured temperature		
Communications	USB 2.0 (removable USB cable and software included) using the Modbus protocol		
Optics	Choice of divergent or focused optics for small or large targets at short or long distances (see Optics)		
Accuracy	± 2°C or 1% of reading, whichever is greater	± 1°C or 1% of reading, whichever is greater	
Repeatability	± 0.5°C or 0.5% of reading, whichever is greater		
Emissivity Setting	0.1 to 1.0		
Minimum Span (4-20 mA output)	Full temperature range		
Minimum Span (4-20 mA output)	100°C		

## ELECTRICAL

Supply Voltage	24 V DC (28 V DC max)
Sensor Voltage (minimum)	6 V DC
Maximum Loop Impedance	900 $\Omega$ @ 24 V DC

## MECHANICAL


Construction	Stainless Steel
Dimensions	$\varnothing$ 27.6 x length 61 mm including cable glands
Thread mounting	M20 x 1 mm pitch, length 15 mm
4-20 mA Output Cable Length	1 m (standard), up to 30 m (optional)
Weight with 1 m Output Cable	155 g
USB Cable Length	1.8 m

## ENVIRONMENTAL

Environmental Rating	IP65
Ambient (Operating) Temperature	0°C to 70°C (cooled models are available for higher temperatures)
Relative Humidity	95% max. non-condensing

## MINIMUM MEASURABLE TEMPERATURE

(PUA2-151-LT ONLY)

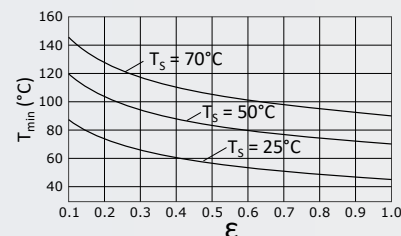

Graph showing the minimum measurable object temperature ( $T_{\min}$ ), determined by surface emissivity ( $\epsilon$ ) and sensor temperature ( $T_s$ ).

## MODEL NUMBERS

Short Wavelength	PUA2	-	251	-	MT	-	WJ
Glass	PUA5	-	251	-	GHT	-	WJ
General Purpose	PUA8	-	301	-		-	WJ



### Cooling

(blank)

WJ

Sensor without cooling  
Air/water cooled jacket with air purge collar

### Temperature range

#### PUA2

**LT** 45°C to 300°C  
(151 models only)

**PT** 100°C to 400°C  
(151 models only)

**MT** 250°C to 1000°C

**HT** 450°C to 2000°C

#### PUA5

**GHT** 200°C to 1650°C

#### PUA8

**(blank)** All models:  
-40°C to 1000°C

### Field of view

#### PUA2

**151** 15:1 divergent optics (LT & PT models only)

**251** 25:1 divergent optics

**751** 75:1 divergent optics

**CF** Close-focus optics (focal spot size  
7.5 mm at 500mm distance)

#### PUA5

**251** 25:1 divergent optics

#### PUA8

**301** 30:1 divergent optics

**CF** Close-focus optics (focal spot size  
5 mm at 100mm distance)

### Spectral response

**PUA2** 2.2 µm, for measuring reflective metals  
and high-temperature objects

**PUA5** 5 µm, for measuring glass surface temperature

**PUA8** 8 to 14 µm, general-purpose,  
for most other applications

## ACCESSORIES



Laser Sighting Tool **LSTL**



Adjustable mounting  
bracket **ABL**



Air/water cooled  
housing **WJ**



Air purge **APL**



Dual laser  
sighting bracket  
**DLSBFL/  
DLSBAL**



Protective Window **PWL**

## ACCESSORIES ALSO AVAILABLE

Fixed mounting bracket **FBL**

Extended analogue output cable (30 m max):

- for PyroUSB models without cooling **PUACE**

- for PyroUSB WJ models **PUACEHT**

3-point calibration certificate **CALCERTA**

**OneTemp<sup>®</sup>** pty Ltd  
MEASURE | CONTROL | RECORD  
[www.onetemp.com.au](http://www.onetemp.com.au)  
**1300 768 887**

## Calex Electronics Limited

PO Box 2, Leighton Buzzard, Bedfordshire, England LU7 4AZ

Tel: +44 (0)1525 373178/853800 Fax: +44 (0)1525 851319 Lo-call Tel: 0845 3108053

E-mail: [mail@calex.co.uk](mailto:mail@calex.co.uk) Online: <http://www.calex.co.uk>

Issue A - June 2017

Specifications subject to change without notice